

# UNIQUE LIGHTING SYSTEM, INC.

INNOVATIVE LIGHTING SOLUTIONS THAT LAST A LIFETIME



**Intrepid** - BRASS KNIGHTS SERIES


## SPECIFICATIONS:

- Voltage: 12 & 24 volt
- Construction: Brass
- Weight: 2.5 Lbs.
- Finish: Weathered Brass
- Shroud: 360° Rotation, O-Ring
- Wire: 25' Intelli-Flex wire factory connected
- Socket: Beryllium Copper, pre-greased
- Wattage: Maximum 35 Watts
- Lens: Clear Convex Tempered Lens, Designer lens kit
- Mounting: Gravity Stake with Orbital Lock Nut 1/2-14 NPSM
- 15 Year Warranty




\*See web for current listings and warranty details

## Up Light Stake Mounted Up Light



One of the most resourceful fixtures in the Brass Knights line the Intrepid offers style and function without compromise. Its sleek straight lines, rotatable shroud feature make the Intrepid an essential fixture when lighting palms, trees, columns or other tall structures.

The Intrepid can be also utilized for back lighting, graze lighting, shadow lighting or simply as a directional up light.

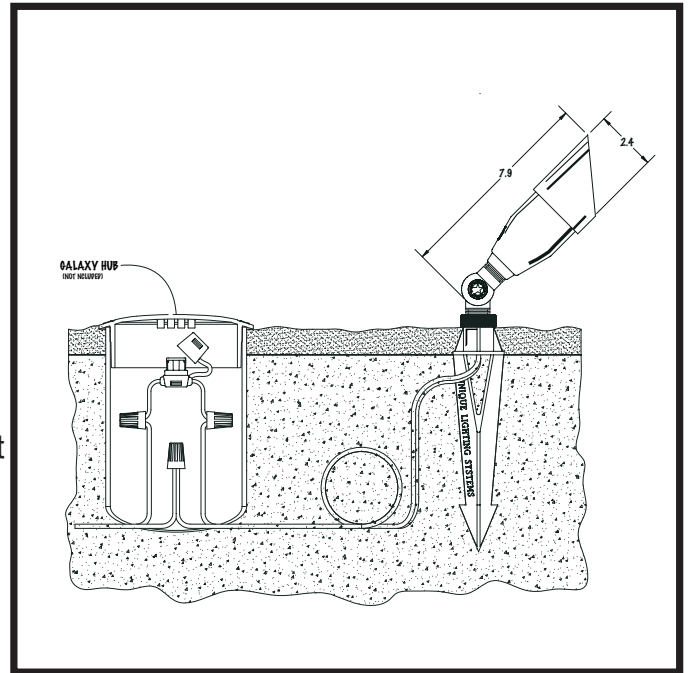


## Project Data:

Project Name:	Project Designer: (company name)
Project Address:	Contact Info:
Project Type:	Contractor: (company name)
Date:	Contractor Info:


UNIQUE LIGHTING SYSTEMS, INC.  
1240 Simpson Way  
Escondido, CA 92029

800.955.4831  
www.uniquelighting.com



## PRODUCT ORDERING INFORMATION

**INTREPID - B25 - 35 - WB** - PACKAGING OPTION - MOUNTING OPTION - LENS OPTION - RISER OPTION - VOLTAGE

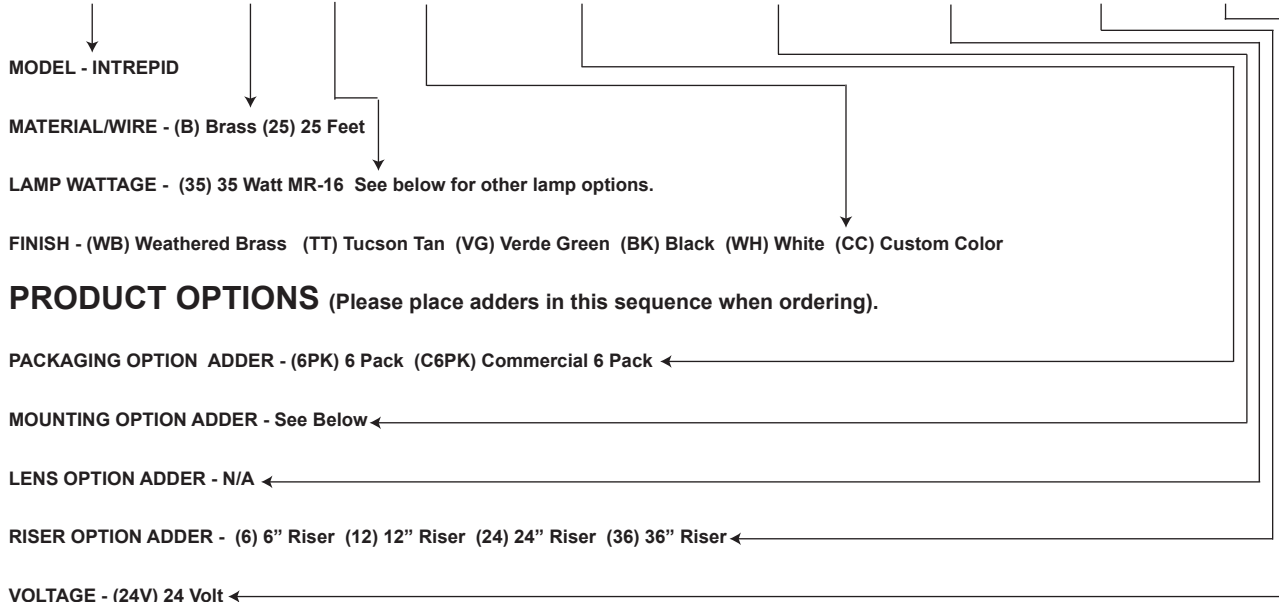

\*12 Volt default

### PRODUCT OPTIONS (Please place adders in this sequence when ordering).

### LAMP OPTIONS

LAMP ORDER #	VOLTAGE	TYPE	WATTS	LIFE SPAN	BEAM ANGLE
35	12V	MR16	35	5,000	36
19	12V	MR16	20	10,000	24
21	12V	MR16	10	1,200	21
22	12V	MR16	10	1,000	32
23	12V	MR16	20	5,000	24
24	12V	MR16	20	10,000	36
25	12V	MR16	20	5,000	60
60	24V	MR16	20	2,500	12
20	24V	MR16	20	2,500	36

### MOUNTING OPTIONS

For Grapic Diagram, See Page (4)

ADDER	PRODUCT
UB	Unibracket
ST	Strat-bracket
SB	Sphere Base
ZG	Zero G
WZ	Zero G Weathered Brass
SS	Stabilizer Stake
GS	Gravity Stake
FS	Fusion Stake

### RISER OPTIONS

For Grapic Diagram, See Page (4)

ADDER	RISER
06	6" Riser
12	12" Riser
24	24" Riser
36	36" Riser


### WIRE OPTIONS

ADDER	WIRE GAUGE / LENGTH
12-50	12/2 50' Wire Lead
12-100	12/2 100' Wire Lead
14-50	14/2 50' Wire Lead
14-100	14/2 100' Wire Lead
16-50	16/2 50' Wire Lead
16-100	16//2 100' Wire Lead


# UNIQUE

LIGHTING SYSTEMS

Up Light  
Stake Mounted Up Light



## Intrepid - BRASS KNIGHTS SERIES

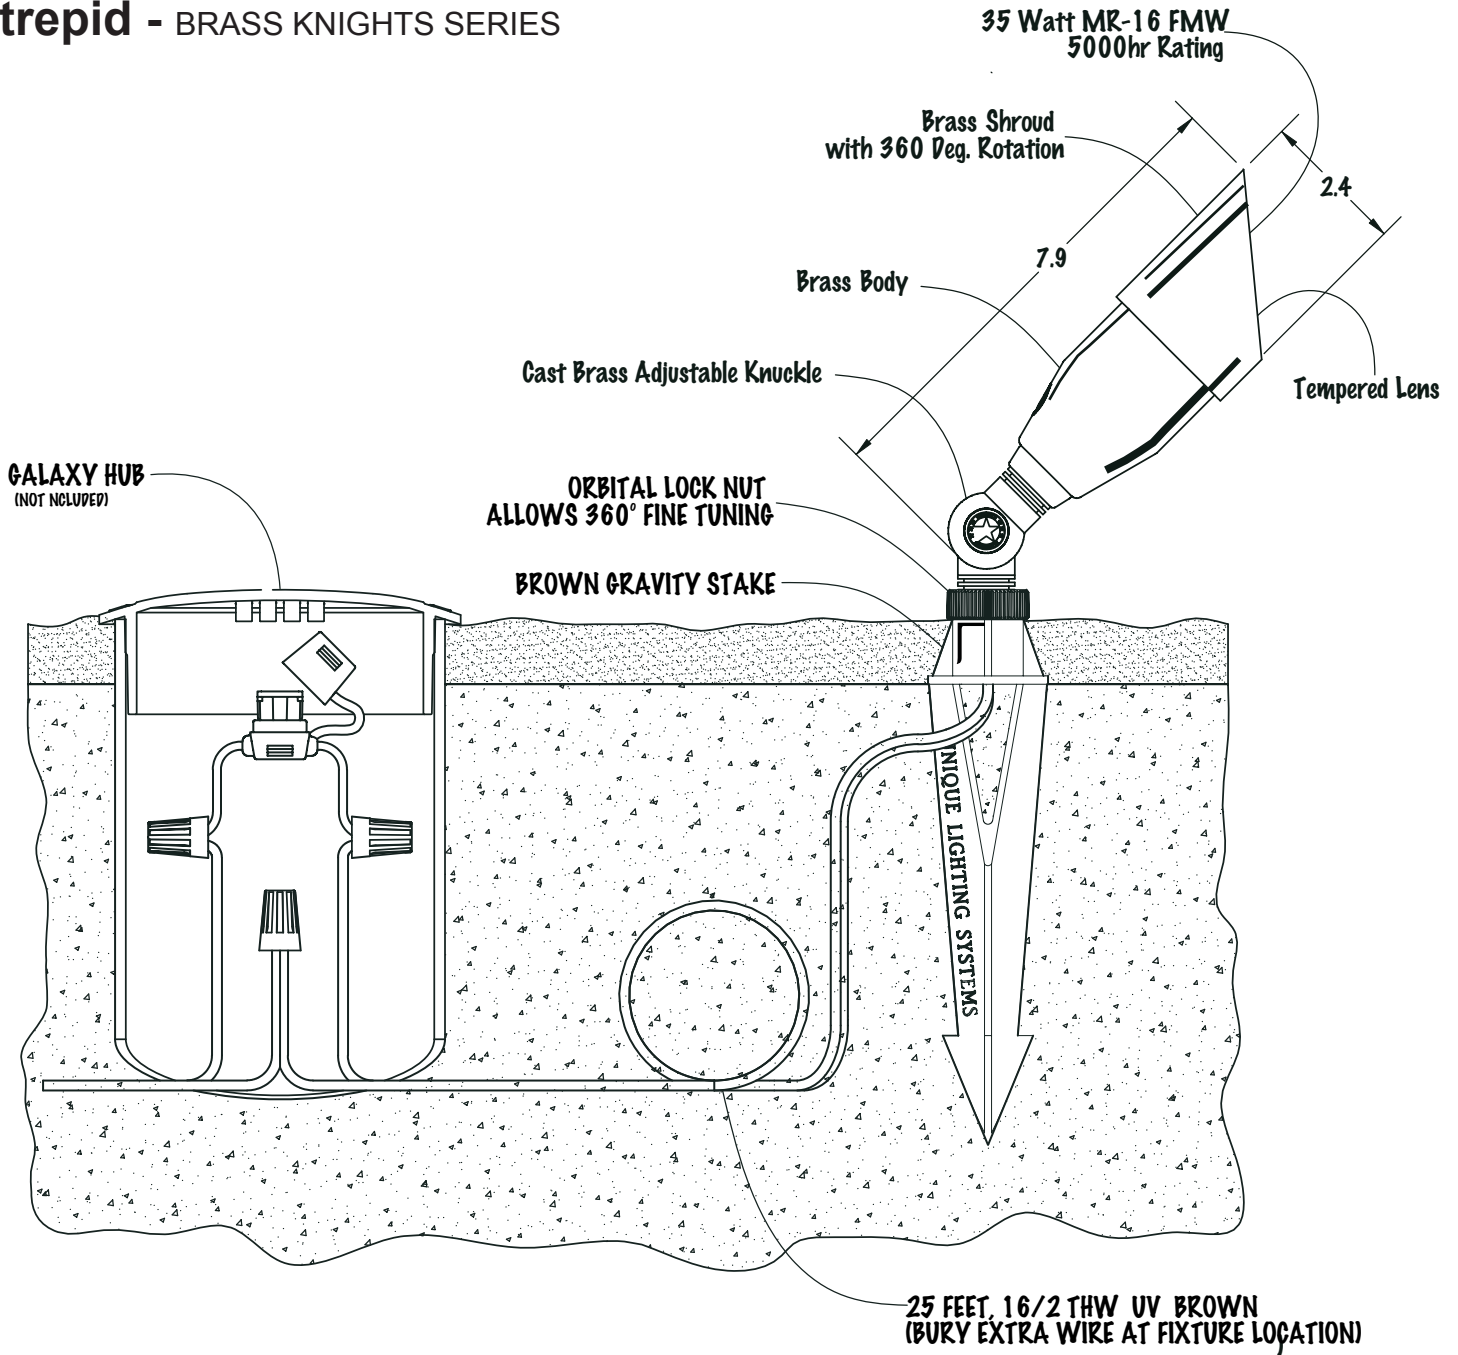

### Glare / Light Trespass

Shroud: Angled / Reduces incidental fixture glare

### Lenses


Tempered Glass / High strength

### True Aim

Knuckle: Brass two piece with thumb screw / Allows for maximum adjustment of light direction

Orbital Lock Nut: Knurled composite nut / Allows for 360° light direction adjustment

## MOUNTING OPTIONS / RISERS / ACCESSORIES

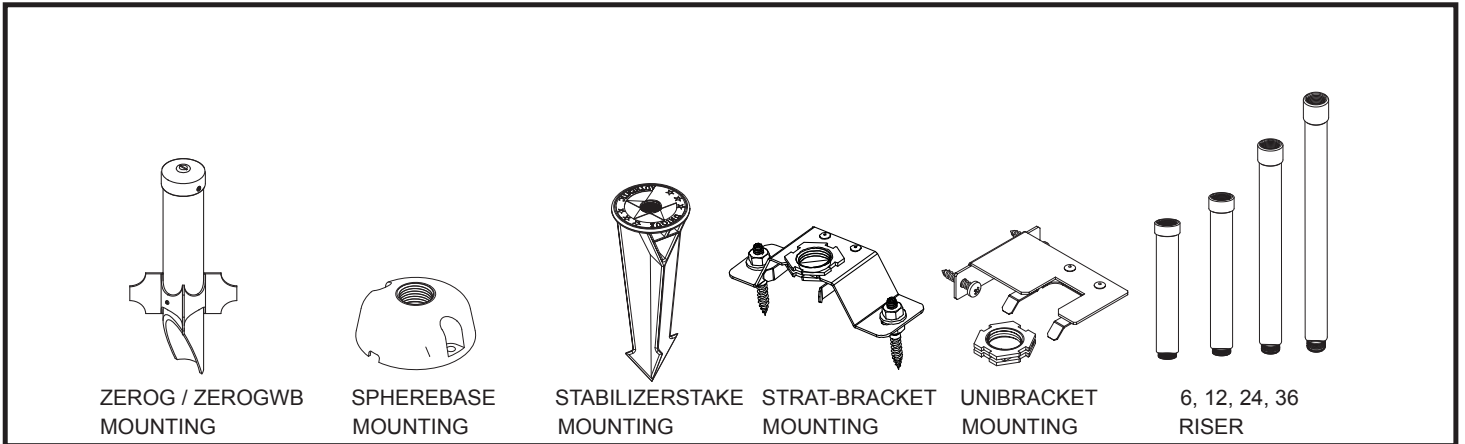


## LENS COMPARISON

*(factory supplied designer lens kit)*


Graphic Representation Only. Not to scale. Our factory supplied designer lenses are used for the adjustment of the beam spread and light intensity. Graphic shown using 35W MR-16FMW 36°.

### No Lens




Normal light/beam output per lamp manufacturer's specs

### Spread Lens




For greater beam spread

### Frosted Lens



For reduced light output and greater beam spread

### Linear Spread Lens



For narrow beam spread

## NOTES