

# UNIQUE LIGHTING SYSTEM, INC.

INNOVATIVE LIGHTING SOLUTIONS THAT LAST A LIFETIME



**Big Bang** - ODYSSEY SERIES


## SPECIFICATIONS:

- Voltage: 12 & 24 volt
- Construction: Cast Brass
- Weight: 4.2 Lbs.
- Finish: Weathered Brass (optional finishes available)
- Shroud: 360° Rotation, Double O-Ring and Locking Screw
- Knuckle: Adjustable With Thumbnut
- Wire: 25' Intelli-Flex wire factory connected
- Wattage: Maximum 50 Watts
- Connections: Anti-Moisture Migration connections
- Lens: Tempered Lens and Designer lens kit
- Mounting: Gravity Stake and Orbital Lock Nut 1/2-14NPSM
- Lifetime Warranty



\*See web for current listings and warranty details


## Up Light Stake Mounted Up Light



A powerful and heavy duty directional up-light, the Big Bang is perfect when illuminating trees, tall structures and vast spaces. The stainless steel lamp retainer secures lamp and lens in place, while the dual o-ring and locking shroud make installation fast and easy.

The Big Bang can be used in numerous applications like back, shadow or graze lighting. It is also the perfect directional light to use when up lighting columns.

PATENT # D518,909

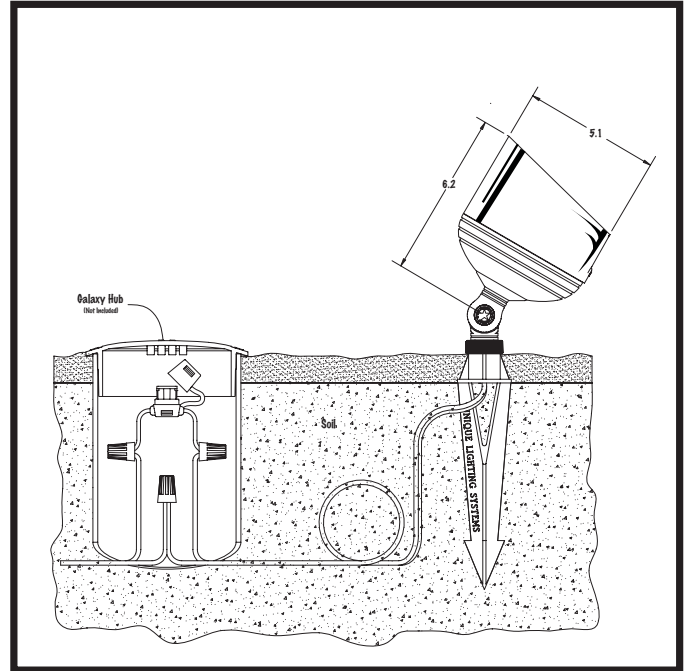


## Project Data:

Project Name:	Project Designer: (company name)
Project Address:	Contact Info:
Project Type:	Contractor: (company name)
Date:	Contractor Info:


UNIQUE LIGHTING SYSTEMS, INC.  
1240 Simpson Way  
Escondido, CA 92029

800.955.4831  
www.uniquelighting.com



## PRODUCT ORDERING INFORMATION

**BIGBANG - B25 - 35 - WB** - PACKAGING OPTION - MOUNTING OPTION - LENS OPTION - RISER OPTION - VOLTAGE

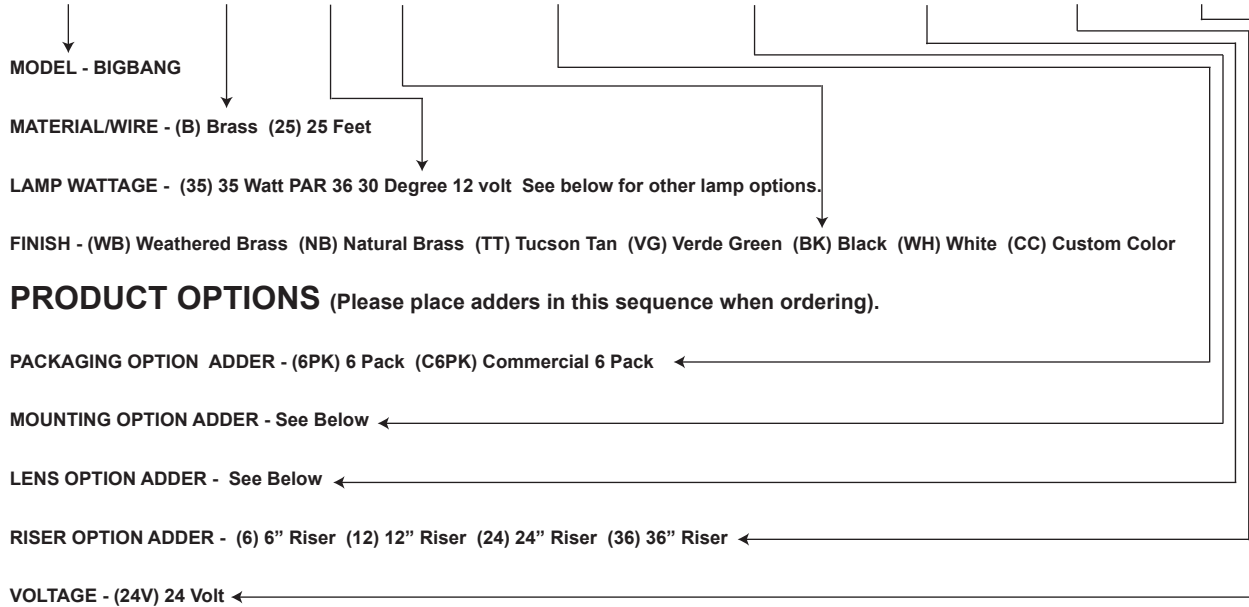

### PRODUCT OPTIONS (Please place adders in this sequence when ordering).

- PACKAGING OPTION ADDER - (6PK) 6 Pack (C6PK) Commercial 6 Pack ←
- MOUNTING OPTION ADDER - See Below ←
- LENS OPTION ADDER - See Below ←
- RISER OPTION ADDER - (6) 6" Riser (12) 12" Riser (24) 24" Riser (36) 36" Riser ←
- VOLTAGE - (24V) 24 Volt ←

\*12 Volt default

### LAMP OPTIONS

LAMP ORDER #	VOLTAGE	TYPE	WATTS	LIFE SPAN	BEAM ANGLE
42	12V	PAR36	35	4,000	8
45	12V	PAR36	18	300	50
46	12V	PAR36	25	2,000	36
47	12V	PAR36	18	5,000	55
<b>35</b>	<b>12V</b>	<b>PAR36</b>	<b>35</b>	<b>4,000</b>	<b>30</b>
48	12V	PAR36	35	4,000	5
49	12V	PAR36	25	4,000	9
52	12V	PAR36	20	5,000	70
42	12V	PAR36	50	4,000	8
50	12V	PAR36	50	4,000	30
51	12V	PAR36	50	4,000	5
35	24V	PAR36	35	4,000	30

### MOUNTING OPTIONS

For Graphic Diagram, See Page (4)

ADDER	PRODUCT
ST	Strat-bracket
SB	Sphere Base
ZG	Zero G
WZ	Zero G Weathered Brass
SS	Stabilizer Stake
<b>GS</b>	<b>Gravity Stake</b>

### RISER OPTIONS

For Graphic Diagram, See Page (4)

ADDER	RISER
06	6" Riser
12	12" Riser
24	24" Riser
36	36" Riser

### WIRE OPTIONS

ADDER	WIRE GAUGE / LENGTH
12-50	12/2 50' Wire Lead
12-100	12/2 100' Wire Lead
14-50	14/2 50' Wire Lead
14-100	14/2 100' Wire Lead
16-50	16/2 50' Wire Lead
16-100	16/2 100' Wire Lead

### LENS COLOR OPTIONS


ADDER	LENS
TL	True Lite
BL	Blue
YL	Yellow
GL	Green
RL	Red
AL	Amber (Turtle Friendly)
OL	Orange (Turtle Friendly)

# UNIQUE


---

## LIGHTING SYSTEMS

**Up Light**  
Stake Mounted Up Light



### Big Bang - ODYSSEY SERIES

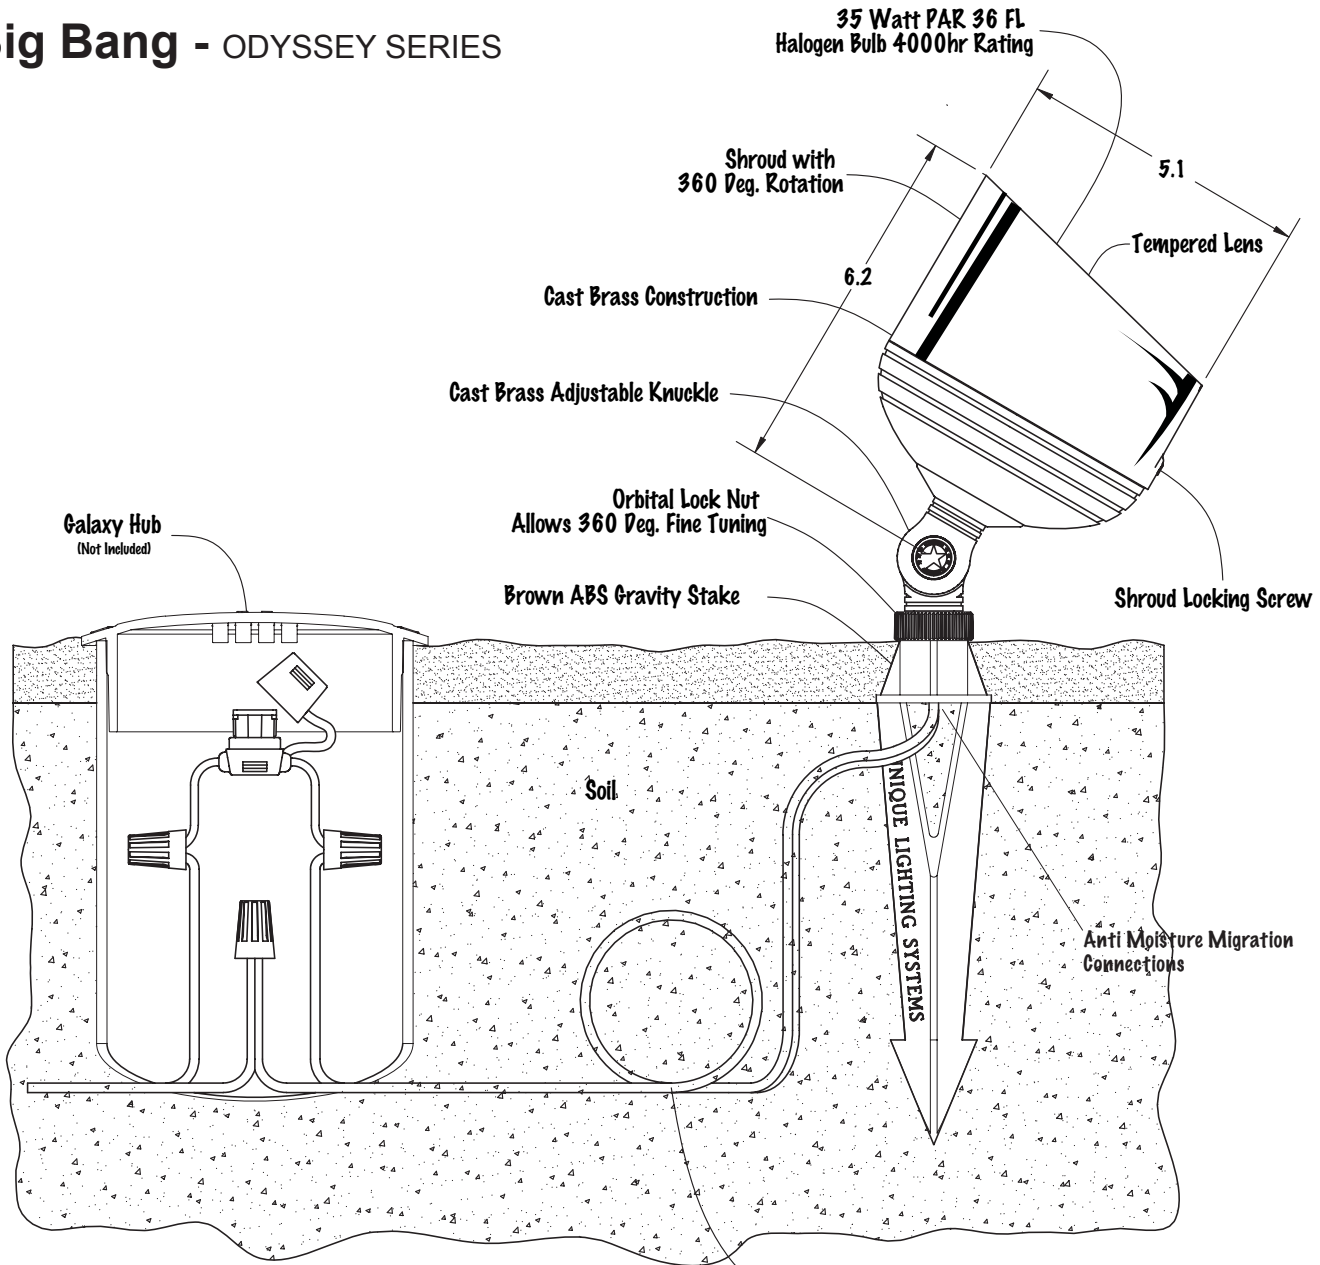

#### Glare / Light Trespass

Shroud: Angled / Reduces incidental fixture glare

#### Lenses

Tempered Glass / High strength and vandal resistant

Frosted, Dimpled, Linear / Ability to fine tune desired light output and change beam spread

Louvers: Baffled Hex / Reduces line of site glare up to 45°

#### Anti-Moisture Migration

Crimps: Polyolefin Heat Shrink tubing / encapsulates and seals connections preventing wicking and corrosion


Wire: Intelli Flex Wire / 99.95% pure copper wire, insulation is made from 99.95% virgin material and is rated for direct burial and sunlight resistant meaning optimum conductivity and no insulation cracking

#### True Aim

Knuckle: Brass two piece with thumb nut / Allows for adjustment of light direction

Orbital Lock Nut: Knurled nut / Allows for 360° light direction adjustment on mounting posts

## MOUNTING OPTIONS / RISERS / ACCESSORIES

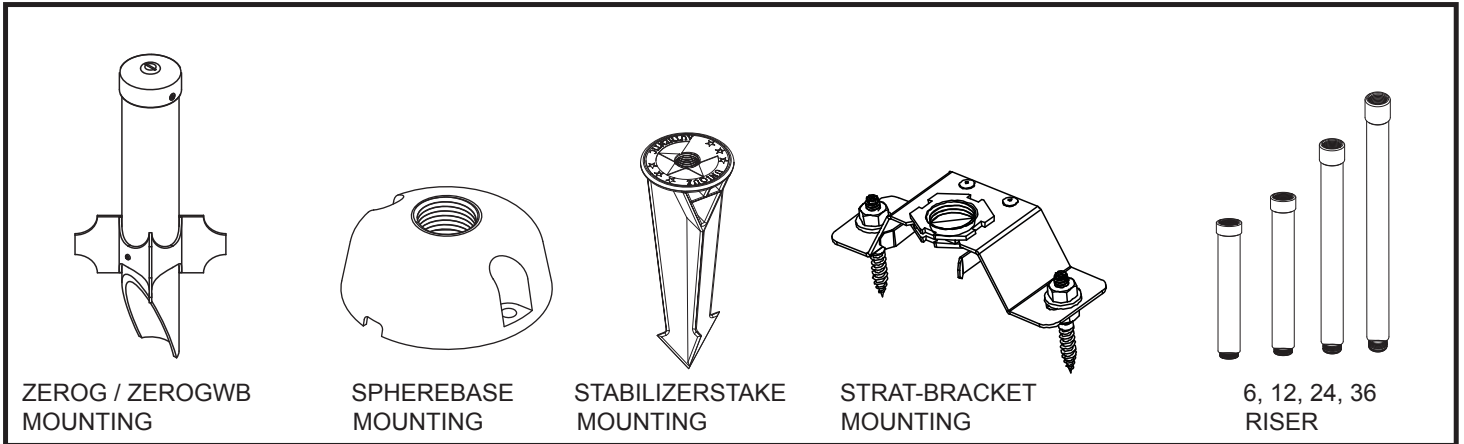

ZEROG / ZEROGWB  
MOUNTING

SPHEREBASE  
MOUNTING

STABILIZERSTAKE  
MOUNTING

STRAT-BRACKET  
MOUNTING


6, 12, 24, 36  
RISER

## LENS COMPARISON

*(factory supplied designer lens kit)*


Graphic Representation Only. Not to scale. Our factory supplied designer lenses are used for the adjustment of the beam spread and light intensity. Graphic shown using 35W MR-16FMW 36°.

**No Lens**




Normal light/beam output per  
lamp manufacturer's specs

**Spread Lens**




For greater beam spread

**Frosted Lens**



For reduced light output and  
greater beam spread

**Linear Spread Lens**



For narrow beam spread

## NOTES