



Starburst - ODYSSEY SERIES


SPECIFICATIONS:

- Voltage: 12 & 24 volt
- Construction: Cast Brass
- Weight: 4.1 Lbs.
- Finish: Weathered Brass (optional finishes available)
- Wire: 25' Intelli-Flex wire factory connected
- Socket: (Dual) Beryllium Copper, pre-greased
- Wattage: Maximum 35 Watts
- Connections: Anti-Moisture Migration connections
- Lens: Clear Lens and Designer lens kit
- Mounting: Gravity Stake 1/2-14 NPSM
- Lifetime Warranty




*See web for current listings and warranty details

Wall Washer
 Stake Mounted Wall Washer




Capable of the most versatile installation applications, the Starburst functions as both a directional up-light or a wall washer fixture. This 8 in 1 fixture features an unprecedented dual socket mount system allowing you to install a vertical MR16 for directional up-lighting or a horizontal Astro-Brite lamp for wall washing when necessary. Both lamps are included with every Starburst for maximum design adaptability.

PATENT # D550,877

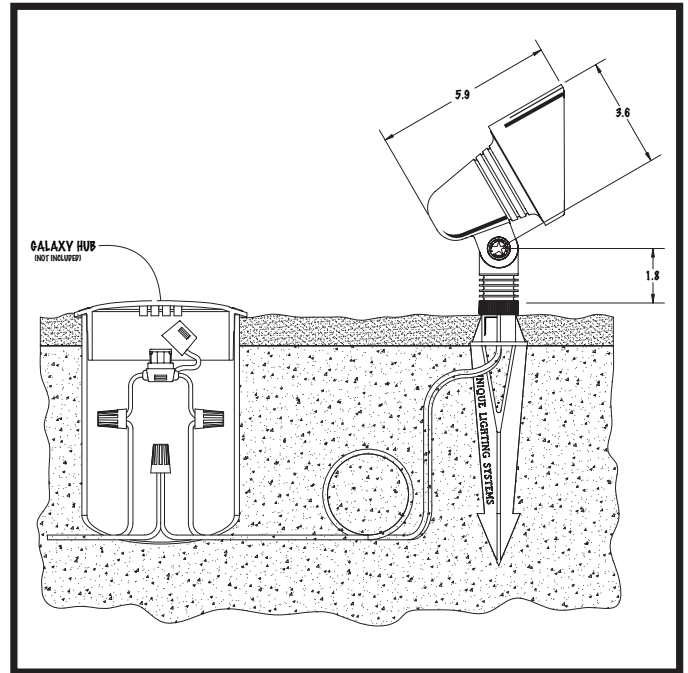


Project Data:

Project Name:	Project Designer: (company name)
Project Address:	Contact Info:
Project Type:	Contractor: (company name)
Date:	Contractor Info:



PRODUCT ORDERING INFORMATION

STARBURST - B25 - 35 - WB - PACKAGING OPTION - MOUNTING OPTION - LENS OPTION - RISER OPTION - VOLTAGE

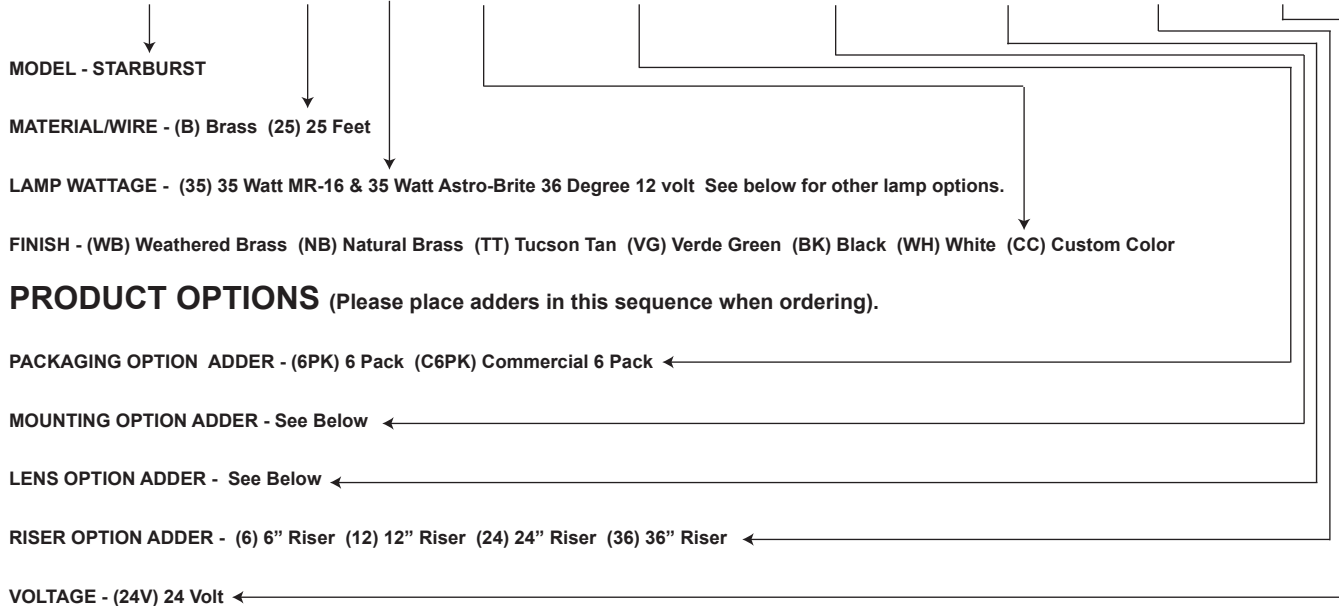

PRODUCT OPTIONS (Please place adders in this sequence when ordering).

- PACKAGING OPTION ADDER - (6PK) 6 Pack (C6PK) Commercial 6 Pack ←
- MOUNTING OPTION ADDER - See Below ←
- LENS OPTION ADDER - See Below ←
- RISER OPTION ADDER - (6) 6" Riser (12) 12" Riser (24) 24" Riser (36) 36" Riser ←
- VOLTAGE - (24V) 24 Volt ←

*12 Volt default

LAMP OPTIONS

LAMP ORDER #	VOLTAGE	TYPE	WATTS	LIFE SPAN	BEAM ANGLE
20	12V	MR16	20	5,000	36
12	12V	MR16	20	5,000	12
35	12V	MR16	35	5,000	36
14	12V	MR16	35	5,000	24
16	12V	MR16	35	10,000	36
19	12V	MR16	20	10,000	24
21	12V	MR16	10	1,200	21
22	12V	MR16	10	1,000	32
23	12V	MR16	20	5,000	24
24	12V	MR16	20	10,000	36
25	12V	MR16	20	5,000	60
26	12V	MR16	35	5,000	12
27	12V	MR16	35	10,000	24
28	12V	MR16	35	10,000	60
29	12V	MR16	35	5,000	60
60	24V	MR16	20	2,500	12
20	24V	MR16	20	2,500	36
61	24V	MR16	35	3,500	12
62	24V	MR16	35	3,500	24
35	24V	MR16	35	4,000	40
53	12V	T3-G4	10	20,000	
20	12V	T3-G4	20	20,000	
54	12V	T5-GY635	35	10,000	
63	24V	T3-G4	10	20,000	
20	24V	T3-G4	20	10,000	
64	24V	T5-G4	35	5,000	

MOUNTING OPTIONS

For Graphic Diagram, See Page (4)

ADDER	PRODUCT
UB	Unibracket
ST	Strat-bracket
SB	Sphere Base
ZG	Zero G
WZ	Zero G Weathered Brass
SS	Stabilizer Stake
GS	Gravity Stake
FS	Fusion Stake

RISER OPTIONS

For Graphic Diagram, See Page (4)

ADDER	RISER
06	6" Riser
12	12" Riser
24	24" Riser
36	36" Riser

WIRE OPTIONS

ADDER	WIRE GAUGE / LENGTH
12-50	12/2 50' Wire Lead
12-100	12/2 100' Wire Lead
14-50	14/2 50' Wire Lead
14-100	14/2 100' Wire Lead
16-50	16/2 50' Wire Lead
16-100	16/2 100' Wire Lead


LENS COLOR OPTIONS

ADDER	LENS
TL	True Lite
BL	Blue
YL	Yellow
GL	Green
RL	Red
AL	Amber (Turtle Friendly)
OL	Orange (Turtle Friendly)


UNIQUE

LIGHTING SYSTEMS

Wall Washer Stake Mounted Wall Washer



Starburst - ODYSSEY SERIES

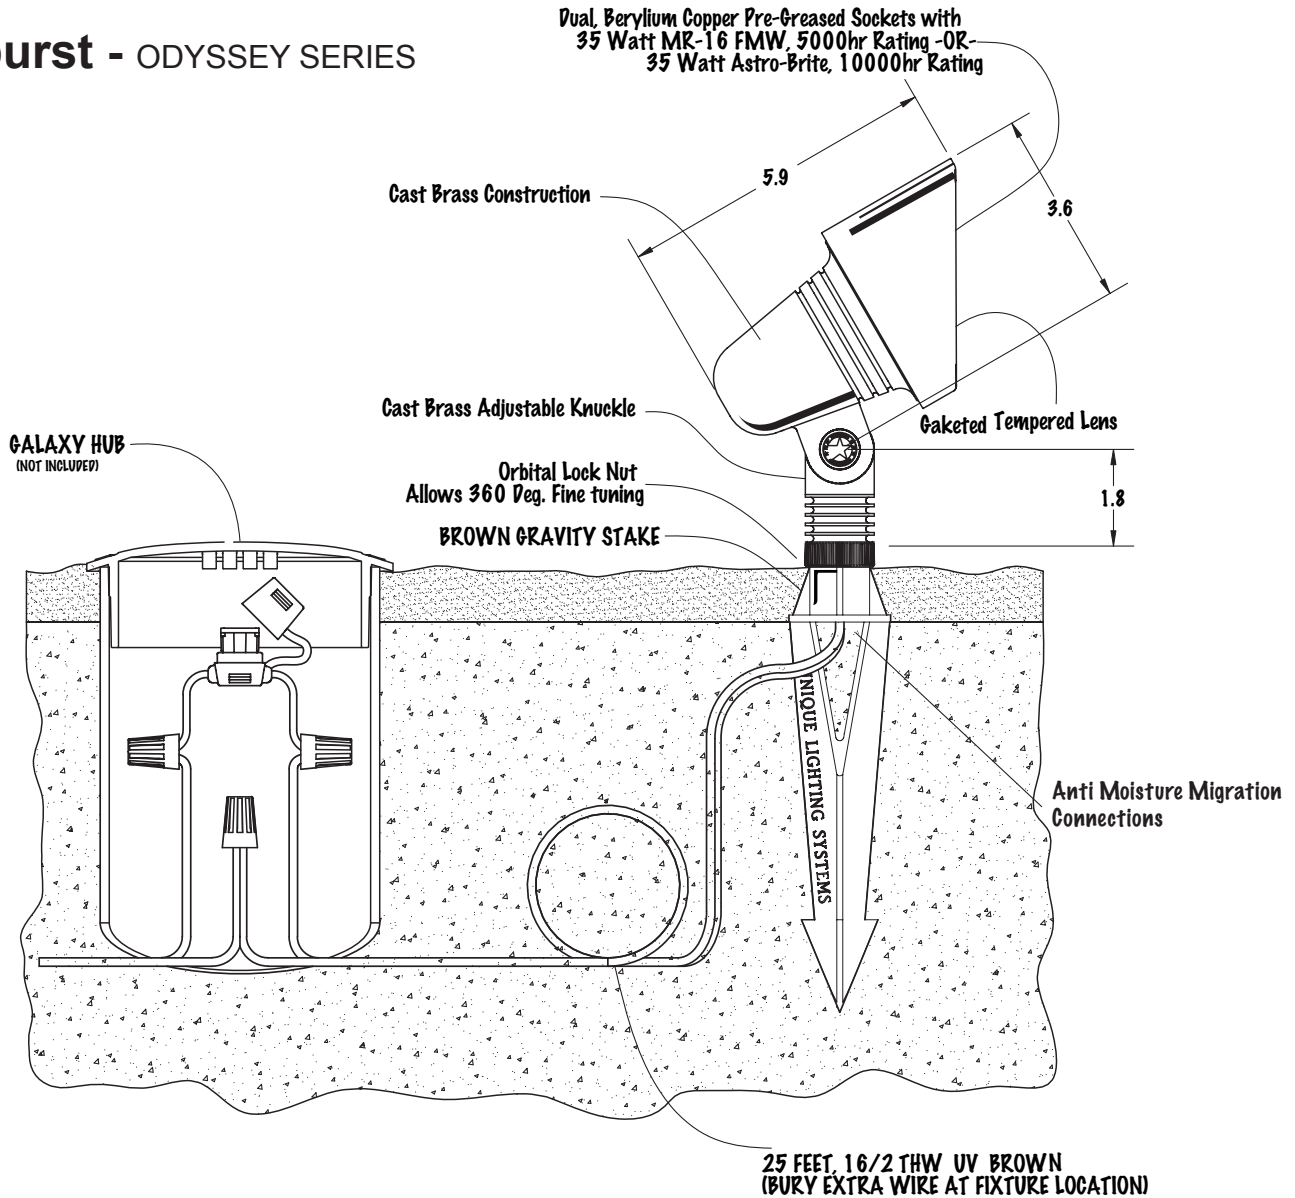

Glare / Light Trespass

Shroud: Angled / Reduces incident fixture glare

Lenses

Tempered Glass / High strength

Frosted, Dimpled, Linear, Spread / Ability to fine tune desired light output and change beam spread

Louver: Baffled Hex / Reduces line of site glare up to 45°

Anti-Moisture Migration

Crimps: Polyolefin Heat Shrink tubing / encapsulates and seals connections preventing wicking and corrosion


Wire: Intelli Flex Wire / 99.95% pure copper wire, insulation is made from 99.95% virgin material and is rated for direct burial and sunlight resistant meaning optimum conductivity and no insulation cracking

True Aim

Knuckle: Brass two piece with thumb screw / Allows for adjustment of light direction

Orbital Lock Nut: Knurled brass nut / Allows for 360° light direction adjustment on mounting stakes

MOUNTING OPTIONS / RISERS / ACCESSORIES

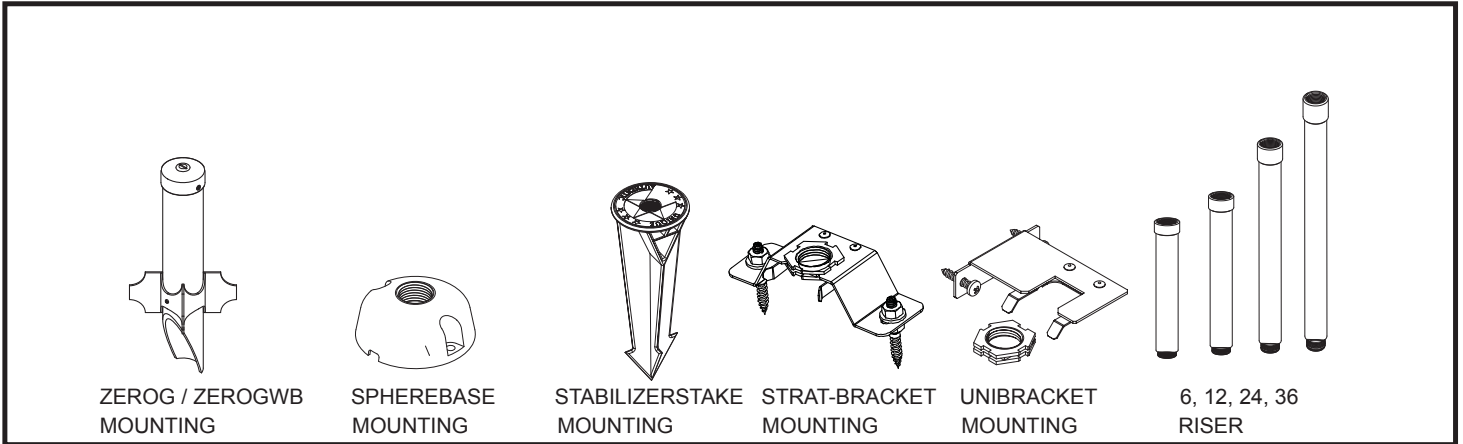

ZEROG / ZEROGWB
MOUNTING

SPHEREBASE
MOUNTING

STABILIZERSTAKE
MOUNTING

STRAT-BRACKET
MOUNTING

UNIBRACKET
MOUNTING


6, 12, 24, 36
RISER

LENS COMPARISON

(factory supplied designer lens kit)


Graphic Representation Only. Not to scale. Our factory supplied designer lenses are used for the adjustment of the beam spread and light intensity. Graphic shown using 35W MR-16FMW 36°.

No Lens




Normal light/beam output per lamp manufacturer's specs

Spread Lens




For greater beam spread

Frosted Lens



For reduced light output and greater beam spread

Linear Spread Lens



For narrow beam spread

NOTES